

## Electronically controlled suspension for motor vehicles

Publication number: EP1167093 (A1)

Publication date: 2002-01-02

Inventor(s): PERELLO GIAN LUIGI [IT]; SANDRI SILVANO [IT]

Applicant(s): FIAT RICERCHE [IT]

Classification:

- international: B60G3/00; B60G3/01; B60G17/015; B60G17/0195; B60T8/00; B62D5/04; B62D7/16; B62D7/18; B62D17/00; B60G3/00; B60G17/015; B60T8/00; B62D5/04; B62D7/00; B62D17/00; (IPC1-7): B60G17/015; B60G3/01; B60G17/08; B60T8/00; B62D6/00; B62D7/00; B62D17/00

- European: B60G3/01; B60G17/0195; B62D5/04F; B62D17/00

Application number: EP20010114030 20010608

Priority number(s): IT2000TQ00627 20000627

Also published as:

EP1167093 (B1)  
US2001054801 (A1)  
JP2002120532 (A)  
ITTO20000627 (A1)  
ES2211698 (T3)

more >>


Cited documents:

US5143400 (A)  
FR2515580 (A1)  
GB453808 (A)  
GB658291 (A)  
US4741516 (A)

more >>

### Abstract of EP 1167093 (A1)

Independent wheel suspension for motor vehicles comprising: a wheel support (12) with a suspension movement and a steering movement, suspension movement guide devices associated to elastic devices (34) and shock absorbing devices (16, 26), and a control device (42, 44, 46, 40) of the wheel support steering movement (12). The wheel support (12) slides along a steering element (16), which is slanted with respect to a vertical axis, and the steering movement control device comprises an electric actuator (42) controlled by an electronic control unit (50) arranged to correct the steering movements induced by the suspension movement.

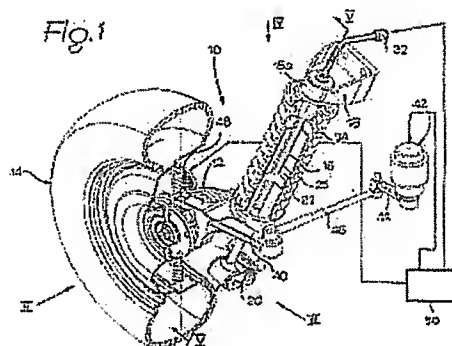





(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
02.01.2002 Bulletin 2002/01

(51) Int Cl.7: **B60G 17/015**, B60G 17/08,  
B60G 3/01, B62D 17/00,  
B62D 6/00, B62D 7/00,  
B60T 8/00

(21) Application number: 01114030.8

(22) Date of filing: 08.06.2001

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• **Perello, Gian Luigi**  
10019 Strambino, Torino (IT)  
• **Sandri, Silvano**  
10037 Saluzzo, Cuneo (IT)

(30) Priority: 27.06.2000 IT TO000627


(74) Representative: **Marchitelli, Mauro**  
**Buzzi, Notaro & Antonielli d'Oulx Srl, Corso**  
**Flume 6**  
**10133 Torino (IT)**

(71) Applicant: **C.R.F. Società Consortile per Azioni**  
**10043 Orbassano (TO) (IT)**

(54) **Electronically controlled suspension for motor vehicles**

(57) Independent wheel suspension for motor vehicles comprising: a wheel support (12) with a suspension movement and a steering movement, suspension movement guide devices associated to elastic devices (34) and shock absorbing devices (16, 26), and a control device (42, 44, 46, 40) of the wheel support steering

movement (12). The wheel support (12) slides along a steering element (16), which is slanted with respect to a vertical axis, and the steering movement control device comprises an electric actuator (42) controlled by an electronic control unit (50) arranged to correct the steering movements induced by the suspension movement.

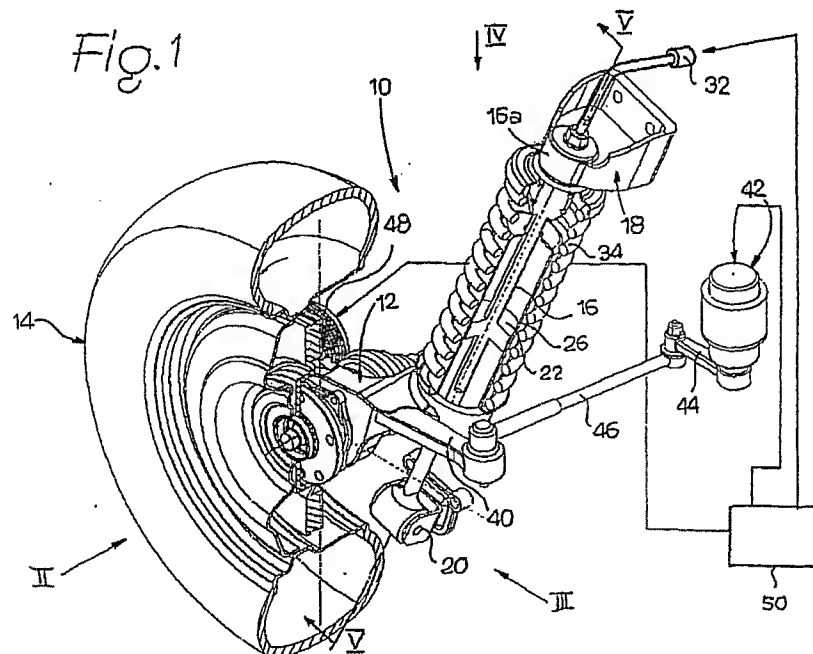



## Description

[0001] This invention relates to an independent wheel suspension for motor vehicles according to the preamble of the main claim.

[0002] A common problem for all suspension systems for steering wheels of motor vehicles is avoiding that the suspension movement of the wheel induces undesired steering. The cinematic solutions for controlling the variations of the toe-in angle of the wheel induced by the suspension movement are generally rather complex and costly, both in terms of the number of components and the complexity of the vehicle assembly operations. An additional problem consists in that the suspensions permit a better control of the toe-in variation induced by the suspension movement (for example, transversal quadrilateral suspensions) are often very cumbersome in the transversal direction and cause an increase in transversal dimensions of the vehicle, especially in the case of vehicles with engine arranged transversally.

[0003] Purpose of this invention is to provide a suspension for motor vehicles which solves said problems. An additional purpose of this invention is to provide a suspension system which consists of a reduced number of components and which can totally be pre-assembled off the vehicle assembly line.

[0004] According to this invention, these purposes are attained by means of a suspension which characteristics are described in the main claim.

[0005] This invention will be better explained by the following detailed descriptions with reference to the accompanying drawings, given as non-limiting example, wherein:

figure 1 is a schematic perspective view of a suspension according to this invention,  
figures 2, 3 and 4 are schematic views according to arrows II, III and IV in figure 1 respectively, and  
figure 5 is a schematic cross-section according to line V-V in figure 1.

[0006] With reference to the figures, numeral 10 indicates an independent wheel suspension for steering wheels of a motor vehicle. Suspension 10 comprises a wheel support 12 on which a wheel 14 turns.

[0007] As shown in greater detail in figure 5, suspension 10 comprises a steering arm 16, preferably straight, with fastening elements 18, 20 connected to the respective extremities destined to be fastened to the body of a motor vehicle (not illustrated). When suspension 10 is fitted on a motor vehicle, the steering arm 16 is fixed with respect to the body of the motor vehicle. In the assembled condition on the motor vehicle, the longitudinal axis A of the steering arm 16 is slanted with respect to a vertical axis. The axis A is slanted both on a longitudinal vertical plane and on a transversal vertical plane. As shown in figures 2, 3 and 4, the lower extremity 16a of the steering arm 16 is moved forward and outwards

with respect to the upper extremity 16b.

[0008] With reference to figure 5, a piston 22 is fastened to the steering arm 16 and presents one or more longitudinal apertures 24 for the passage of damping fluid. The wheel support 12 is fastened to a tubular element 26 arranged coaxially with respect to the steering arm 16 and slides with respect to the latter in the longitudinal direction A. The tubular element 26 presents closed extremities 28, which engage and hold the steering arm 16. The tubular element 26 defines two chambers 30, arranged on opposite sides with respect to the piston 22, and filled with a damping fluid. Consequently, the tubular element 26 forms the external casing of a shock absorber. The wheel support 12, which is integral with the tubular element 26 is free to move the suspension in the direction of axis A and a steering movement consisting of an oscillation around the axis A. According to a particularly advantageous form of embodiment of this invention, the damping characteristics of the shock absorber formed by the steering arm 16, the piston 22 and the tubular casing 26 can be controlled electronically. This can be obtained, in a way which is known, using a damping fluid with magnetic-rheological qualities or by arranging electronically controlled valves in the fluid passage apertures 24. In figure 5, numeral 32 schematically indicates an electric connector for providing electric damping characteristic control signals to the shock absorber.

[0009] An elastic element 34, consisting for example of a compressed coil spring, is arranged in coaxial position around the tubular element 26. The lower extremity of the elastic element 34 rests on a plate 36 fastened to the wheel support 12. The upper extremity of the elastic element 34 rests on a plate 38 fastened to the upper extremity 16b of the steering arm 16.

[0010] The wheel support 12 is fastened to a steering lever 40, which is operated by an electric actuator 42, destined to be fastened to the body of the motor vehicle. In the form of embodiment illustrated in the figures, the actuator 42 is rotary. A linkage 44, controlling the steering lever 40 via a connecting rod 46, is connected to the output shaft of the actuator. The electric actuator 42 is capable of controlling the rotation movement of the wheel support 12 around axis A, which amplitude is correlated to the rotation of the steering wheel of the motor vehicle. Each steering wheel is equipped with an electric actuator 42, reason for which no mechanical interconnection between the two steering wheels on the two sides of the vehicle is required.

[0011] The suspension according to this invention is preferably equipped with an electrically controlled braking device 48, which can be of any known type. As schematically illustrated in figure 1, an electronic control unit 50 sends electric control signals to the electric actuator 42, to the shock absorber 16, 26 and to the electromechanical brake 48.

[0012] The suspension according to this invention can be completely pre-assembled off the vehicle assembly



line. The entire suspension requires only two fastening points to the body of the motor vehicle, consisting of fastening elements 18, 20. The suspension unit is, consequently, characterized by extreme assembly simplicity and very reduced size in the transversal direction, thanks to the absence of suspension rocker arms.

[0013] The suspension movement of the wheel 14 with respect to the body of the vehicle is a straight movement along the direction of the slanted axis A. Considering that the direction of movement of the suspension is slanted with respect to the suspension of the wheel, if the actuator 42 remained still during the suspension movement of the wheel, the wheel toe-in angle would vary, induced by the suspension movement of the wheel. This toe-in angle variation would produce undesired steering of the wheel. In order to overcome this problem, according to this invention, the electronic control unit 50 is arranged to control the electric actuator 42 so to correct the undesired toe-in angle variations related to the movement of the suspension. For this purpose, the electronic control unit 50 receives a signal indicating the position of the wheel support 12 with respect to axis A and, according to this function, computes the correction angle required to compensate for the change in the toe-in angle, whereby controlling the electric actuator 42 so to impose a steering angle equal and opposite to the movement of the wheel support 12 along axis A to the wheel support 12.

[0014] Furthermore, the electronic control unit 50 can be arranged to receive signals indicating the longitudinal and transversal acceleration of the vehicle and to control the damping characteristics of the shock absorber according to said signals, to control rolling and pitch of the vehicle. Furthermore, the electronic control unit 50 controls the braking device 48 and the steering actuator 42 according to the braking and steering controls of the vehicle driver by means of the brake pedal and the steering wheel.

[0015] The suspension according to this invention can be used without substantial changes for front and rear wheels and for both driving and idle wheels. The suspension according to this invention permits setting steering control in an individual way on the individual wheels for obtaining ideal steering from a cinematic point of view, without the constraints deriving from the steering mechanism. Also the shock absorber damping and the braking control strategies can be controlled individually on each wheel. In addition to a particularly reduced transversal size, the suspension according to this invention is also characterized by reduced size in the vertical direction, because the vertical size of the suspension depends only on the maximum amplitude of the suspension and is not conditioned by the cinematic structure of the wheel suspension mechanism.

## Claims


1. Independent wheel suspension for motor vehicles comprising:

a wheel support (12) with a suspension movement and a steering movement, suspension movement guiding devices associated to elastic devices (34) and shock absorbing devices (16, 26), and a control device (42, 44, 46, 40) of the wheel support steering movement (12),

characterized in that the wheel support (12) slides along a steering element (16), which is slanted with respect to a vertical axis, and in that the steering movement control device comprises an electric actuator (42) controlled by an electronic control unit (50) arranged to correct the steering movements induced by the suspension movement.

2. Suspension according to claim 1, characterized in that it comprises an electric actuator (42) associated to each steering wheel (14).
3. Suspension according to claim 1, characterized in that said steering element (16) comprising a straight rod, which extremities are equipped with attachment devices (18, 20) for fastening to the body of a motor vehicle.
4. Suspension according to claim 3, characterized in that the wheel support (12) is fastened to a tubular element (26) sliding with respect to the steering arm (16) and forming the external casing on a shock absorber.
5. Suspension according to claim 4, characterized in that said shock absorber is equipped with electrically controlled devices for changing the damping characteristics.
6. Suspension according to claim 1, characterized in that it comprises an electrically controlled braking device (48).



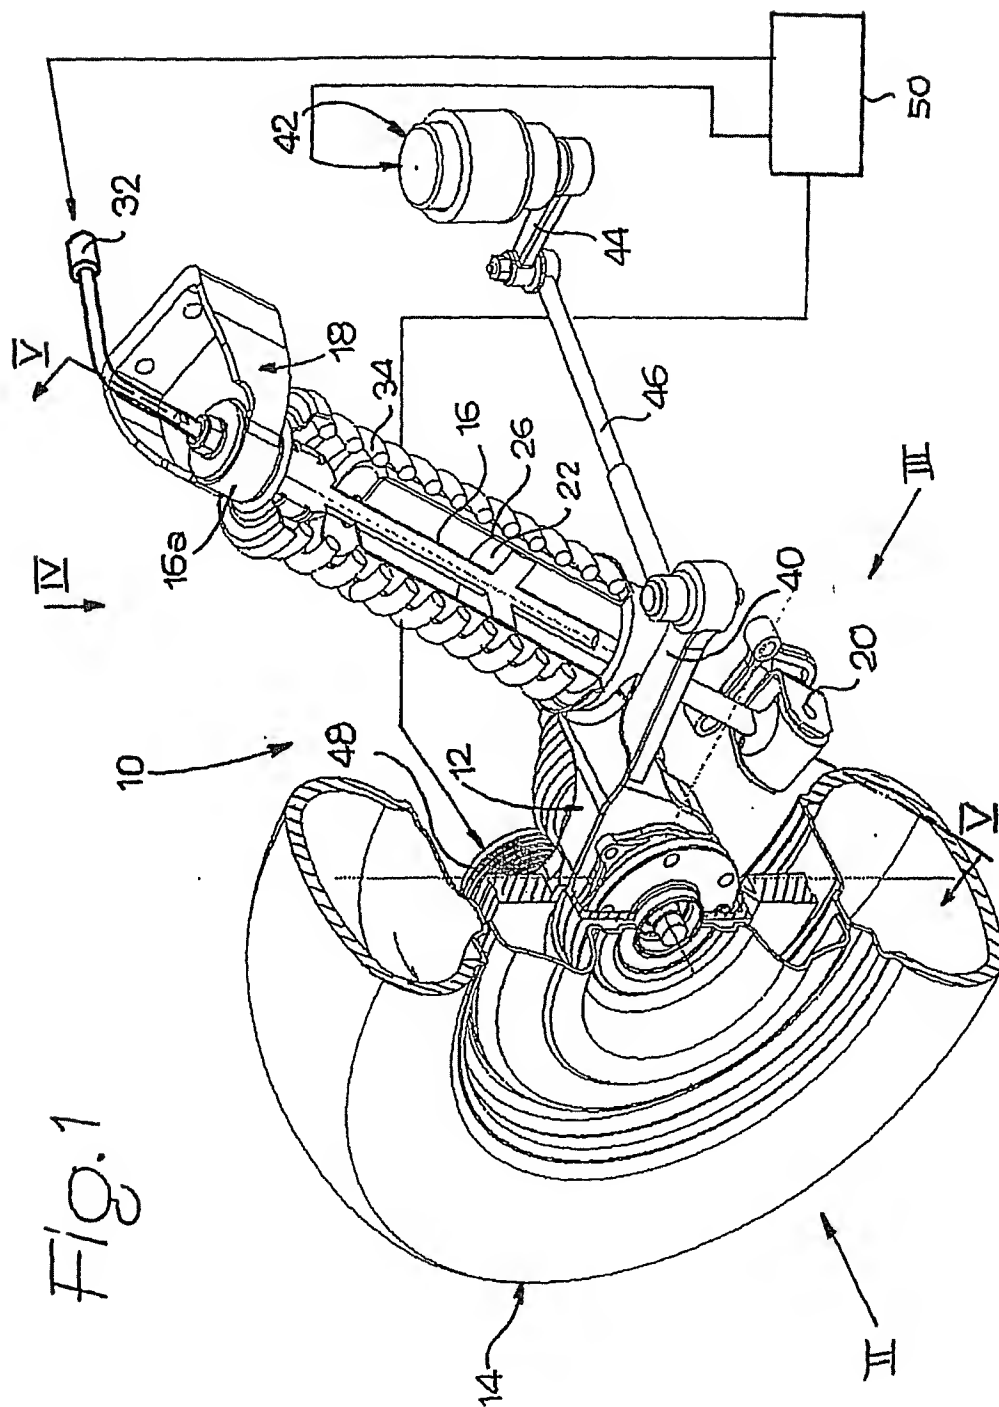



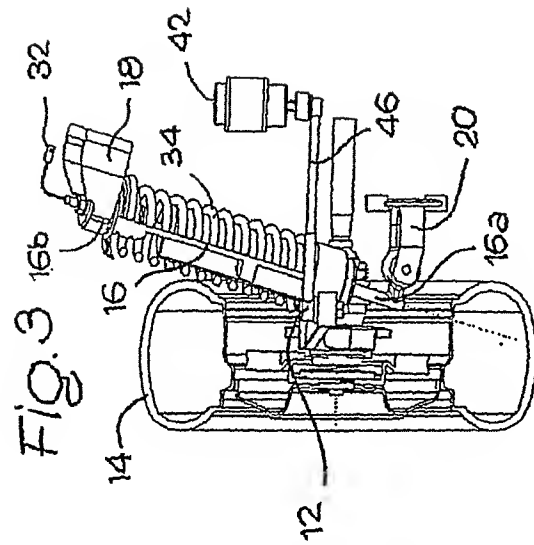


Fig. 4



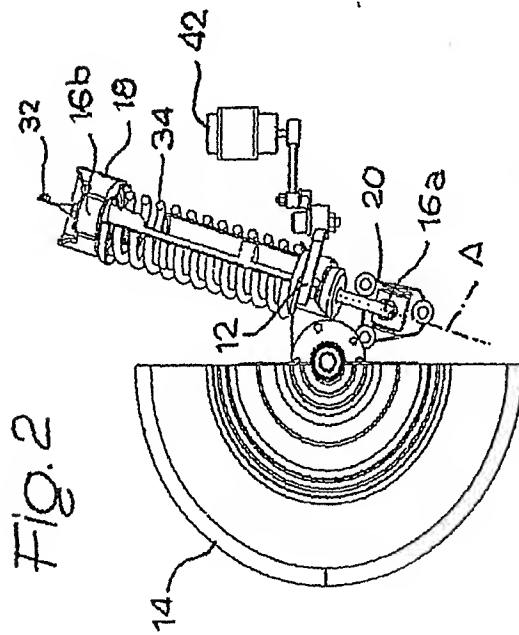




Fig. 5



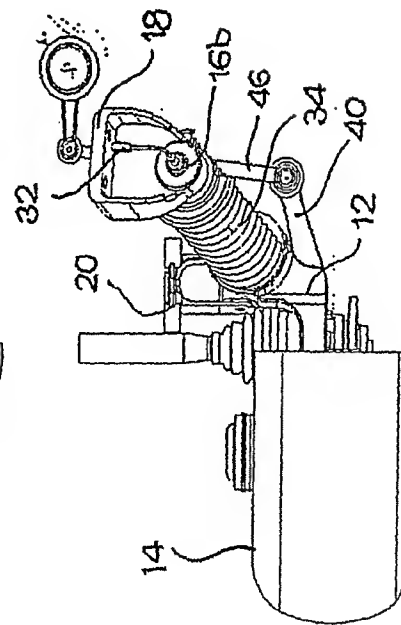

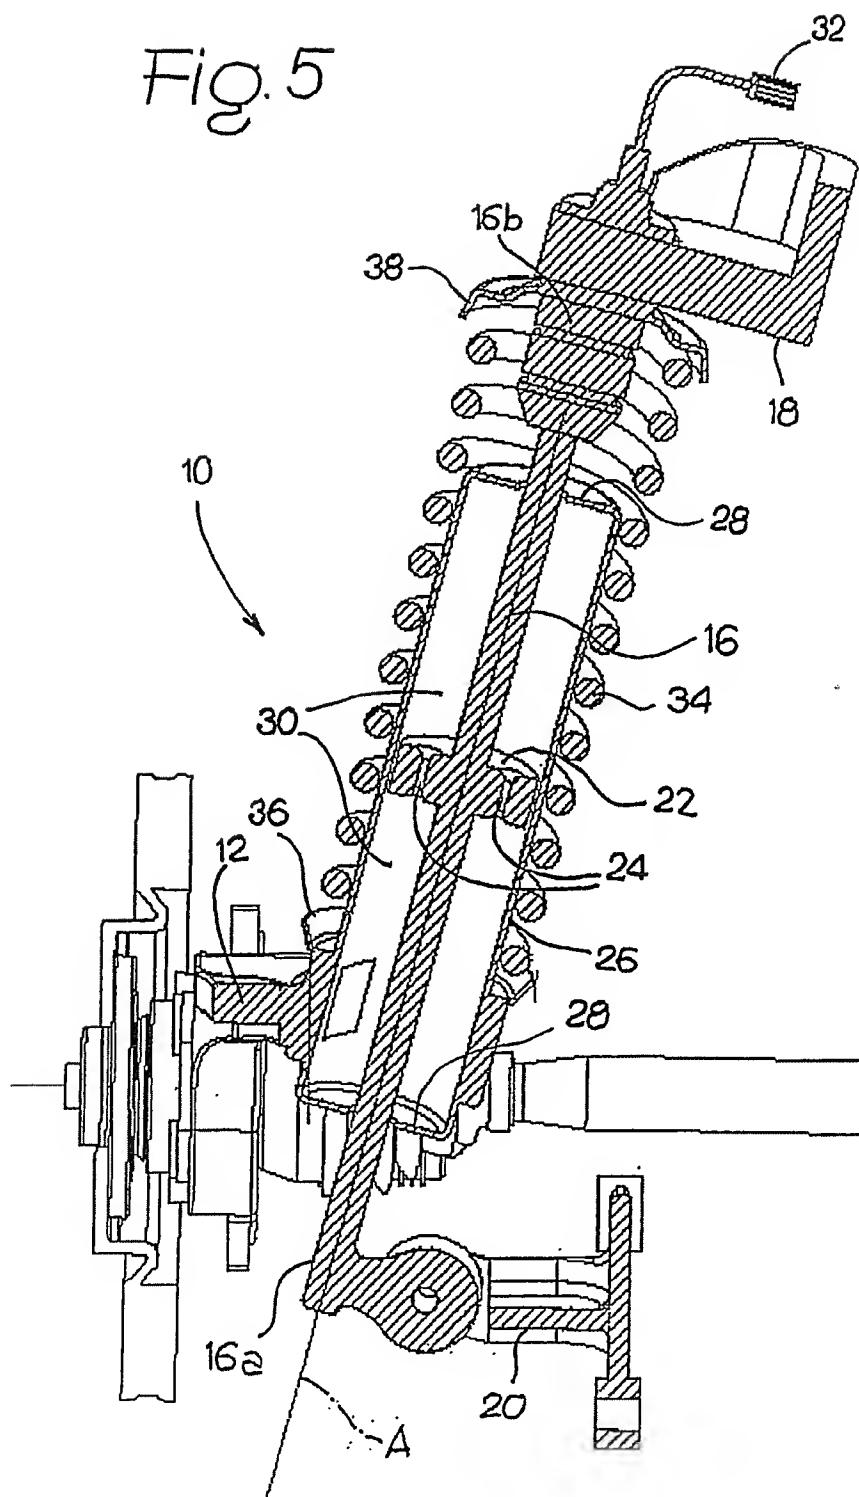

European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 11 4030

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InLCI.7)
Y	US 5 143 400 A (MILLER GERALD R ET AL) 1 September 1992 (1992-09-01) * the whole document *	1-4	B60G17/015 B60G17/08 B60G3/01 B62D17/00 B62D6/00 B62D7/00 B60T8/00
Y	FR 2 515 580 A (DUPORT GUY) 6 May 1983 (1983-05-06) * page 1, line 1 - line 38; figure *	1-4	
Y	GB 453 808 A (FRIEDRICH EUGEN MAIER) 18 September 1936 (1936-09-18) * figures 1-3,5,6 *	1-4	
A	GB 658 291 A (VALFNTINE PAGE;BIRMINGHAM SMALL ARMS CO LTD) 3 October 1951 (1951-10-03) * figures *	1,3,4	
A	US 4 741 516 A (DAVIS LEO W) 3 May 1988 (1988-05-03) * abstract; figures *	1,5	
A	PATENT ABSTRACTS OF JAPAN vol. 015, no. 298 (M-1141), 29 July 1991 (1991-07-29) & JP 03 109139 A (MAZDA MOTOR CORP), 9 May 1991 (1991-05-09) * abstract; figures 1,2,4,7,10,12 *	1,5,6	TECHNICAL FIELDS SEARCHED (InLCI.7) B60G B62D
A	US 5 438 515 A (MIICHI YOSHIKI ET AL) 1 August 1995 (1995-08-01) * abstract; figures 1-5 *	1	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 23 August 2001	Examiner Tsitsilonis, L
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EP 01 11 4030 A1 (1995) (1995-08-01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 11 4030

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-08-2001

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5143400	A	01-09-1992	NONE	
FR 2515580	A	06-05-1983	NONE	
GB 453808	A	18-09-1936	NONE	
GB 658291	A	03-10-1951	NONE	
US 4741516	A	03-05-1988	US 4652008 A	24-03-1987
			US 4735402 A	05-04-1988
			AU 604077 B	06-12-1990
			AU 8244887 A	16-06-1988
			BR 8706752 A	05-07-1988
			CA 1303077 A	09-06-1992
			EP 0271050 A	15-06-1988
			JP 63159119 A	02-07-1988
			MX 165867 B	08-12-1992
			US 5316272 A	31-05-1994
			US 4877222 A	31-10-1989
JP 03109139	A	09-05-1991	NONE	
US 5438515	A	01-08-1995	JP 6127243 A	10-05-1994
			JP 6127244 A	10-05-1994
			JP 6171335 A	21-06-1994
			DE 4335093 A	21-04-1994
			GB 2271968 A,B	04-05-1994
			KR 9700621 B	16-01-1997

EPO FORM P0489

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82